

AREALIGHT.X



FIXTURE CODE: **ALX**

APPEARANCE

HOUSING	LENS	MOUNTING	DIFFUSION
<ul style="list-style-type: none"> • BLACK • COL - CUSTOM 	<ul style="list-style-type: none"> • TEMPERED GLASS 	<ul style="list-style-type: none"> • POLE TOP (ARM) 	<ul style="list-style-type: none"> • NONE

ELECTRICAL CHARACTERISTICS

- Standard AC input: up to 480 VAC
- EMI filter: 47CFR, part 2, part 15
- Power factor: >.9
- Total harmonic distortion: <20%
- Surge protection: IEC/EN 61000-4-5 EMC test standard

OPTIONAL UPGRADES

- **PMOCC120** - Pole Mounted Occupancy Sensor 120V
- **PMOCC277** - Pole Mounted Occupancy Sensor 277V


OPTIONAL BEAM SPREAD AND TYPE DISTRIBUTION

- **80D** - Optional 80° Beam Spread
 - **T1** - Optional Type 1 Distribution* For HEX-042, HEX-084¹, HEX-126¹
 - **T2** - Optional Type 2 Distribution* For HEX-042, HEX-084¹, HEX-126¹
 - **T3** - Optional Type 3 Distribution* For HEX-042, HEX-084¹, HEX-126¹
 - **T4** - Optional Type 4 Distribution*
For HEX-042, HEX-084, HEX-063, HEX-105, HEX-126, LIN-140, HEX-168, HEX-210, HEX-252
 - **TRS or TLS** - Optional Right or Left Slanted Distribution*
For HEX-021¹, HEX-042¹, HEX-063¹, HEX-084¹, HEX-105¹, HEX-126¹, HEX-168¹, HEX-210¹, HEX-252¹
- * Applicable for listed light engine retrofits only
¹ Applies to rectangular light engine retrofit geometries only

DIMENSIONS

LENGTH: 24"
HEIGHT: 15.4"

MOUNT HEIGHT: 7.5"
MOUNT LENGTH: 7.5"

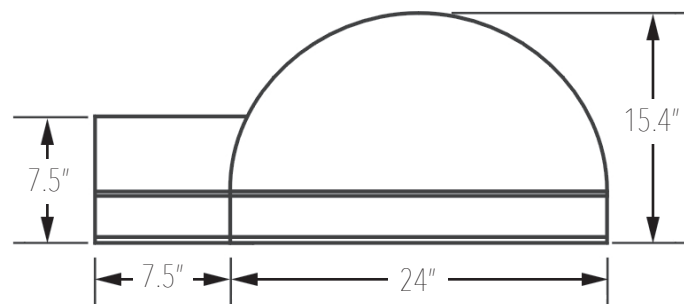

LIGHT ENGINE RETROFITS

- L70 Rated life of 100,000+ hours
- Minimum CRI: 70; Custom CRI available upon request.
- Operating temp: -30° C to +60° C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- Eligible for Rebates
- 50-90% energy savings
- Manufactured in the USA


INSTALLATION

- Licensed electrician required
- Contact Noribachi for additional support

WARRANTY

- 5 year manufacturer's warranty
- **10YR** - Optional 10 year manufacturer's warranty
- US manufacturing and quality control

CERTIFICATIONS



AREALIGHT.X

AVAILABLE LIGHT ENGINE RETROFITS



HEX-021

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	32W	75-175W	4,431lm	HEX-021-B-CW-MT-ALX

HEX-042

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	63W	125-300W	8,862lm	HEX-042-B-CW-MT-ALX

HEX-063

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	95W	200-400W	13,293lm	HEX-063-B-CW-MT-ALX

HEX-084

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	126W	300-525W	17,724lm	HEX-084-B-CW-MT-ALX

HEX-105

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	158W	400-650W	22,155lm	HEX-105-B-CW-MT-ALX

AREALIGHT.X

AVAILABLE LIGHT ENGINE RETROFITS



HEX-126

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	189W	550-800W	26,586lm	HEX-126-B-CW-MT-ALX

HEX-168

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	252W	725-1200W	35,448lm	HEX-168-B-CW-MT-ALX

HEX-210

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	315W	1000-1450W	44,310lm	HEX-210-B-CW-MT-ALX

HEX-252

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	378W	1250-1700W	53,172lm	HEX-252-B-CW-MT-ALX