


LED Wall Pack




"The only wall pack in the industry with a patented tilt board design allowing you to change the angle of the projected light..." LED Magazine

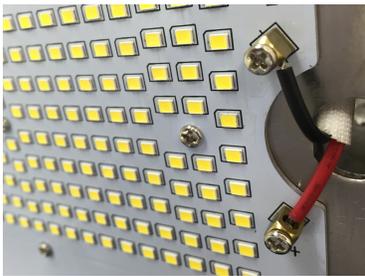



Specifications

Wattage:	40W	60W	90W
Model Number:	AE-L-WP-40	AE-L-WP-60	AE-L-WP-90
DLC #:	JR-QJ-16100-40	JR-QJ-16100-60	JR-QJ-16100-90
DLC Partner:	JOLIGHTING		
UL & CUL Number	E468385 / Deploys 40W Driver DRM-0360090		
Certifications:			
Voltage:	120-277V		
Power Factor:	0.98		
Frequency:	50/60Hz		
Lumens Efficiency:	100LM/W		
Kelvin (CCT):	4000K/4500K/5000K		
CRI:	82+		
IP Rating:	IP65		
Lens:	Glass		
Materials:	Die Cast Aluminum		
Finish:	Black (Default)		
LM70 Life Time:	100,000		
Dimming Availability:	NA. (Default)		
Warranty:	5 Years		
Temperature Range:	-34°C ~ 54°C (-30°F ~ 120°F)		
Weight:	4.1KG 9.0LB	4.1KG 9.0LB	6.6KG 15.0LB
Packaging Dimensions:	395*280*245MM 15.6*11.0*9.6INCH	395*280*245MM 15.6*11.0*9.6INCH	475*275*285MM 18.7*10.8*11.2INCH
Replacement Wattage:	150W	250W	350W


Dimensions

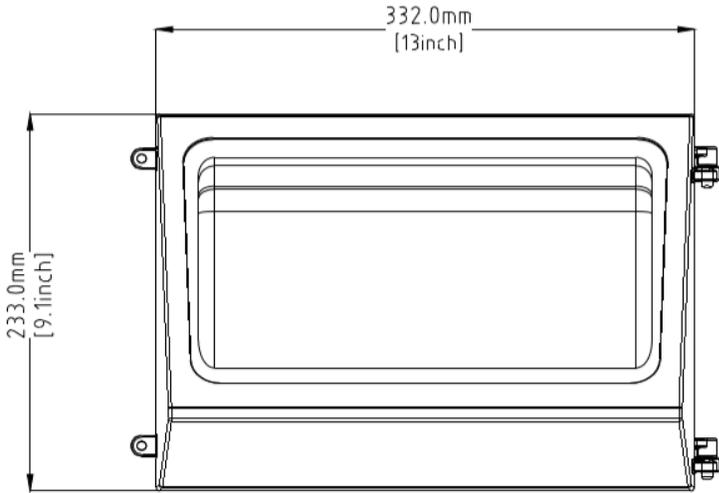

40W/60W

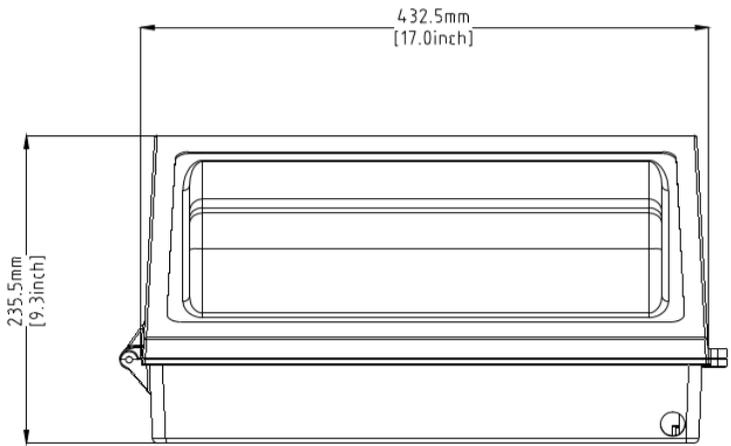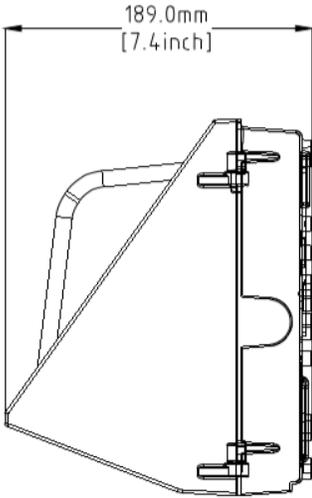

90W

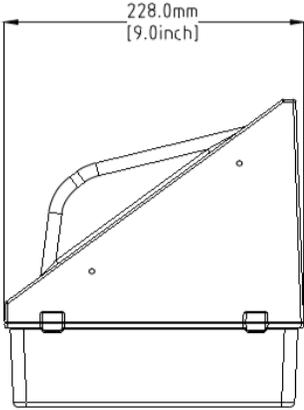

User Guide

Note:

Please read this entire manual to fully understand and safely use the luminaire. The products can be used at the voltage of 100-277V AC, 50/60HZ, suitable for indoor and outdoor, moisture proof and dust proof. Specifications are subject to change without notice. Please visit www.altechefficiency.com for the most recent product information.

Unpacking:

1. Unpack and carefully examine the product.
2. Report any damage and save all packing materials if any part(s) were damaged during shipping.
3. Do not attempt to use the fixture if it is damaged.

Before You install:

1. Before installing any light fixtures, read and understand all cautions, warnings, instructions and product labels. Failure to do so can result in injury and/or void the warranty.
2. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
3. The product should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
4. Risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.

Maintenance:

1. Disconnect the product from the power supply prior to cleaning.
2. Use a dry or slightly moistened cloth for cleaning.
3. Never use any chemicals or abrasive materials for cleaning.

Installation Instructions:

1. Loosen the screws on the side of the wall pack and open the fixture.
2. Loosen the secure screw on the right side of the light board.
3. Swivel open the light board to expose the back of the fixture.
4. Connect the input and ground wires of the fixture to the power supply. **White is live. Black is neutral. Green is ground.**
5. Secure the fixture to the mounting box with screws.
6. Connect the LED array to the output leads of driver.
7. Close the light board and replace the secure screw.
8. Close the fixture, replace and tighten the two housing screws.
9. This fixture is designed for years with minimum care. For optimum performance, periodically clean the lens with a mild, non abrasive glass cleaner and soft cloth. DO NOT use solvents or cleaners containing abrasive agents. When cleaning the fixture, make sure you have the power turned off and do not spray liquid cleaner directly onto the LED, socket or wiring.

