LED-CANDLE

120VAC or 277VAC

NEPTUN® LIGHT

lightinnovations@work™

Technical Data: LED Candle - Operating Voltage 120VAC or 277VAC

Electronic, Candelabra Base (E12), HPF, 120 or 277VAC - 60Hz, 70,000 Hours Life													Energy Savings Replacements for Incandescent		
Item No. (specify voltage) 120V or 277V	Watts	Input Line Current @ 120V or 277V	Beam Angle	Power Factor	THD	M.O.L. (Inch)	D (Inch)	Base	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
LED-61303-727	3.5	0.037-0.016 Amp	360°	>0.50	<15%	4.50	1.50	E12	2700	>76	203	58	25	250	10
LED-61303-730	3.5	0.037-0.016 Amp	360°	>0.50	<15%	4.50	1.50	E12	3000	>76	210	60	25	250	10
LED-61303-741	3.5	0.037-0.016 Amp	360°	>0.50	<15%	4.50	1.50	E12	4100	>76	214	61	25	250	10
LED-61303-750	3.5	0.037-0.016 Amp	360°	>0.50	<15%	4.50	1.50	E12	5000	>76	218	62	25	250	10

Ordering Example:
LED-61303-730-**120V**

APPLICATION INFORMATION:

SUITABLE FOR USE IN INDOOR ENVIRONMENTS: TRACK LIGHTS AND DECORATIVE FIXTURES
NOT FOR USE IN FULLY ENCLOSED FIXTURES
NOT FOR USE WHERE DIRECTLY EXPOSED TO WATER

Features and Benefits

* Color Temperature of 2700°K - Matching Incandescent bulbs
* Reliable start at the lowest setting
* 360° Beam Angle
* InstantON and Instant Full Brightness
* High Luminous Efficacy: Up to 65 Lm/W
* Integrated high efficiency driver
* Wide range of operation ambient temperatures: -20°C - +60°C
* New! Patented Technology: Any working position with stable light output
* Superior Lumen Maintenance of 70% after 50,000 hours of use
* Maintenance free - Long Life operation
* No UV or IR radiation
* Environmentally Friendly - mercury and lead free
* RoHS Compliant
* 5 Year Warranty

75% Energy Savings

Operation costs over life of LED bulb

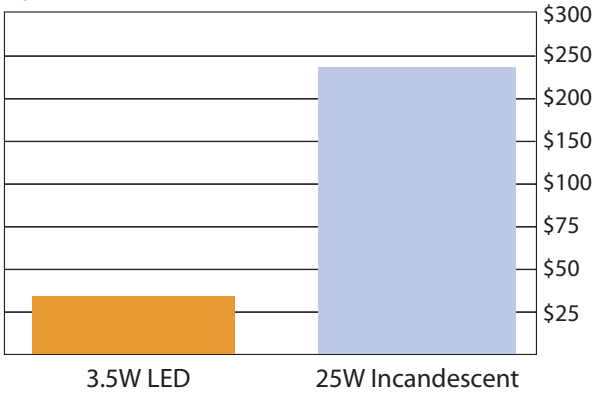

*Based on $0.10 KW/H
** 12Hrs. per day usage

NEPTUN® LIGHT

© Copyright 2012 NEPTUN LIGHT, Inc.