




TIEXING HONGYUN USA CO. LED DIVISION

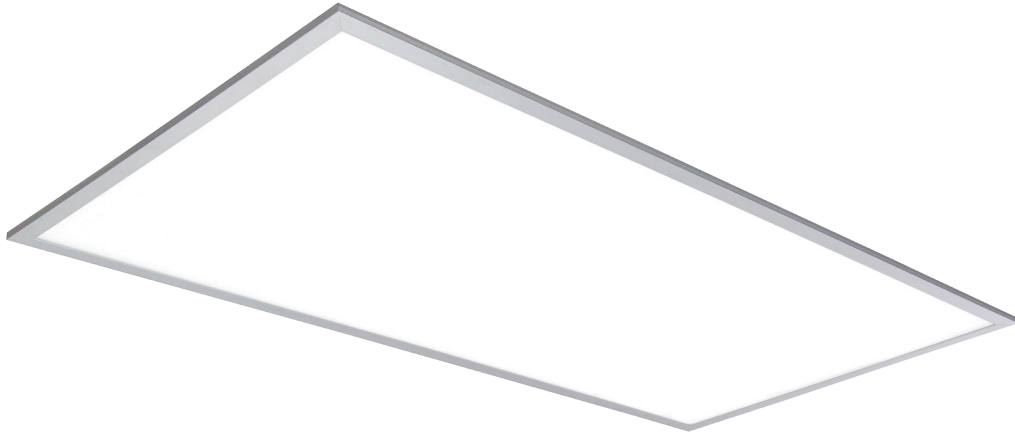


Technical Application Guide for TIEXING LED Panel Light

TYT-PL2X4-60W

TYT-PL2X4-60WD



Introduction

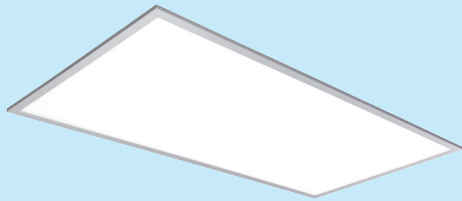

TIEXING LED troffer adopts LM-80 SMD led chip, with UL&cUL, DLC approved for North America market. 1X4, 2X2, 2X4 sizes are available for various demand. Branded led driver with top quality component ensures long life time. 0-10V dimmable and non-dimmable version both provided.

The ultra slim profile fits seamlessly into any workplace.

- Up to 80% energy saving compared to standard CFL
- Long lifetime of 50,000 hours
- 0-10V dimmable with MeanWell dimmable driver
- 120° wide beam angle
- 1213x603mm cutout
- CCT: 2700K 3000K
4000K 5000K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

Application notes

- IP40 for indoor use
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas



Application Areas

Widely used for various commercial lighting and residential lighting applications, such as offices, shopping mall, hotel, restaurant, hospital, home lighting etc.

Certificates



Product Information

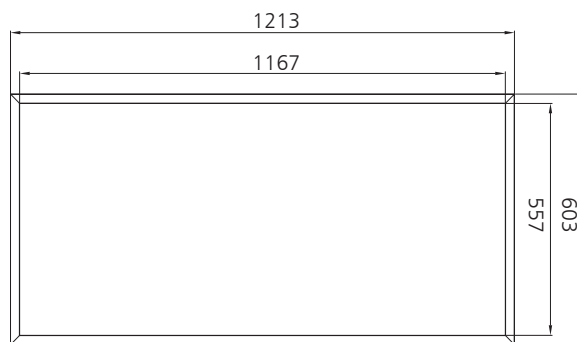

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
TYT-PL2X4-60W	AC100-277V	60W	≥0.9	5100	120°	2700K	50000h	≥80	No	1213*603*10mm
TYT-PL2X4-60W	AC100-277V	60W	≥0.9	5160	120°	3000K	50000h	≥80	No	1213*603*10mm
TYT-PL2X4-60W	AC100-277V	60W	≥0.9	5220	120°	4000K	50000h	≥80	No	1213*603*10mm
TYT-PL2X4-60W	AC100-277V	60W	≥0.9	5280	120°	5000K	50000h	≥80	No	1213*603*10mm
TYT-PL2X4-60WD	AC100-277V	60W	≥0.9	5220	120°	2700K	50000h	≥80	Yes	1213*603*10mm
TYT-PL2X4-60WD	AC100-277V	60W	≥0.9	5280	120°	3000K	50000h	≥80	Yes	1213*603*10mm
TYT-PL2X4-60WD	AC100-277V	60W	≥0.9	5340	120°	4000K	50000h	≥80	Yes	1213*603*10mm
TYT-PL2X4-60WD	AC100-277V	60W	≥0.9	5400	120°	5000K	50000h	≥80	Yes	1213*603*10mm





Driver data Sheet

Driver data	DIM	Non-dim
Input rated Voltage	AC100-277V	AC100-277V
Frequency	50/60Hz	50/60Hz
Input Voltage	AC90-305V	AC90-305V
Efficiency	≥85%	≥85%
Total load Wattage	57W±5%	57W±5%
Power Factor	≥0.9	≥0.9
Rated input current	≤0.7A	≤0.7A
Full load output Voltage	DC35-38V	DC35-38V
Rated output current	1400mA	1400mA
Output current range	1400mA±5%	1400mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	1%-100%	—
Dimmer	0V-10V dimmer	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
Withstand voltage	AC3750V	AC3750V





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
60W	II	IP40	-20°C-45°C	0-90%	-20°C-65°C


Spectral Distribution

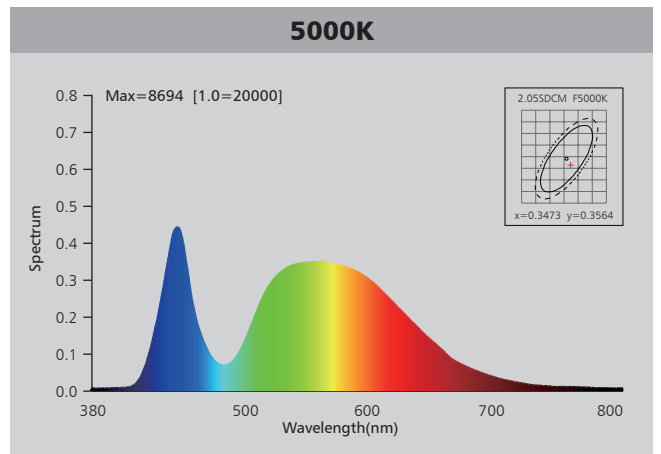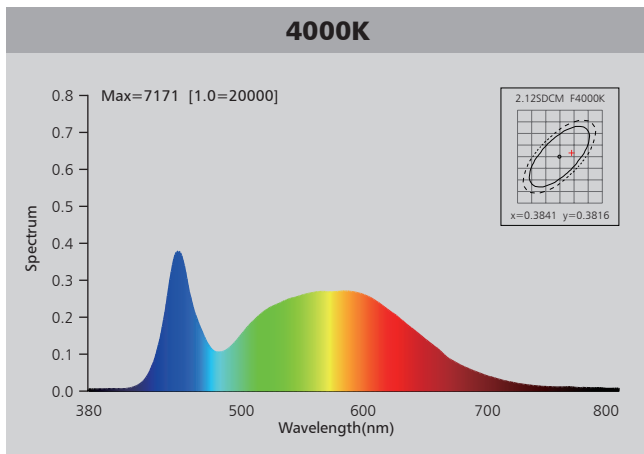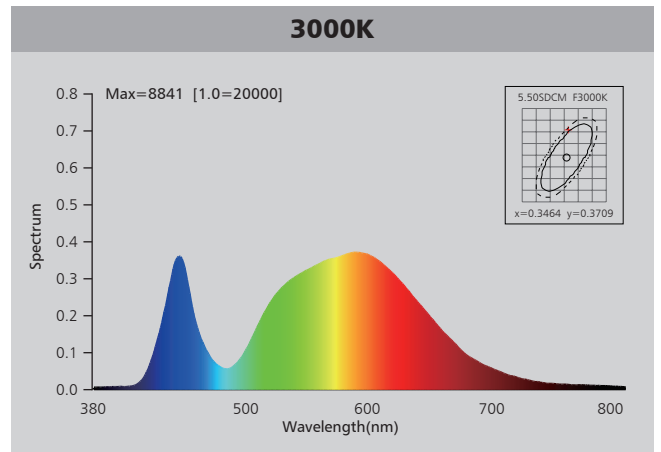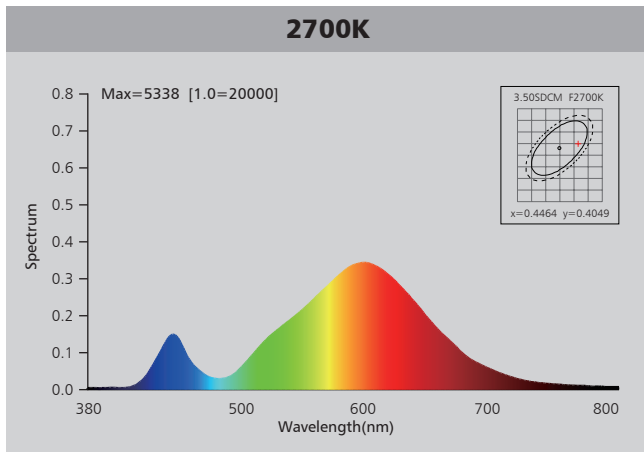

Photometric Diagram

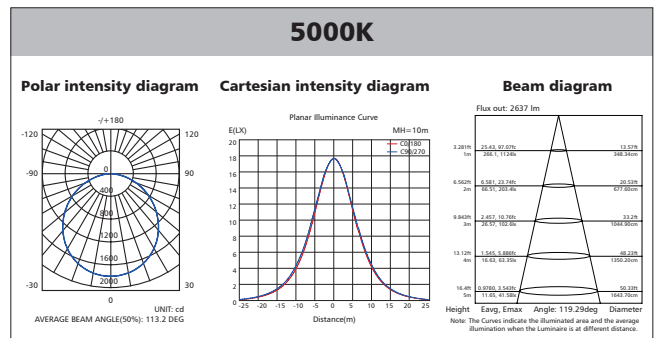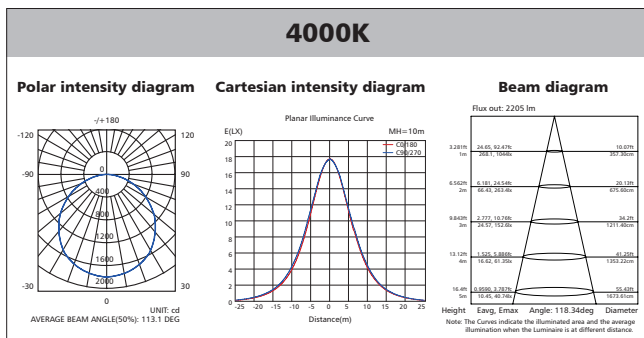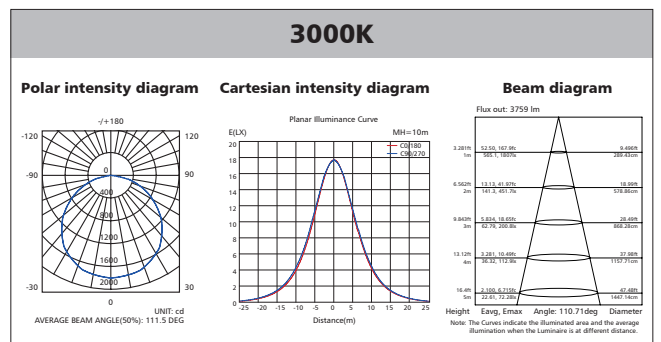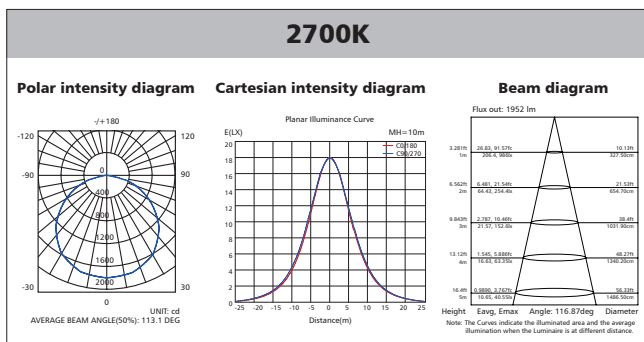



Polar Diagram Comparison

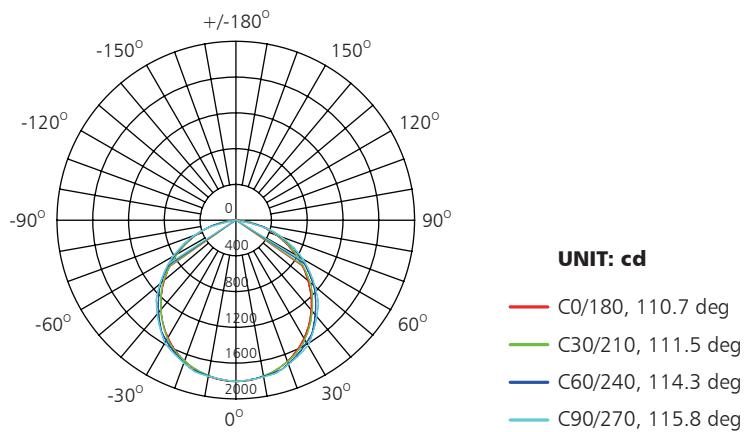

AVERAGE BEAM ANGLE (50%): 113.1DEG




Driver lifetime & LED light decay rate

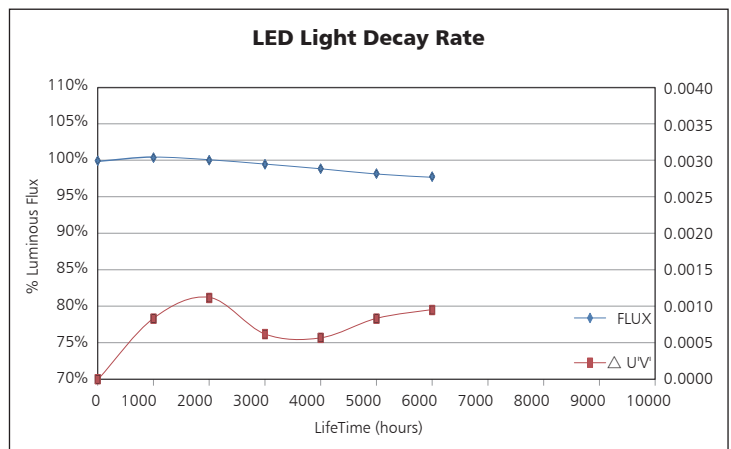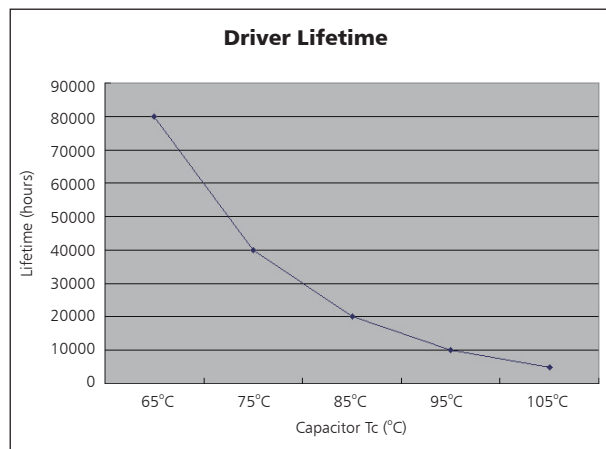


Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C. Working at 75°C or below, the lamp can achieve its maximum lifetime of 40,000 hours.
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

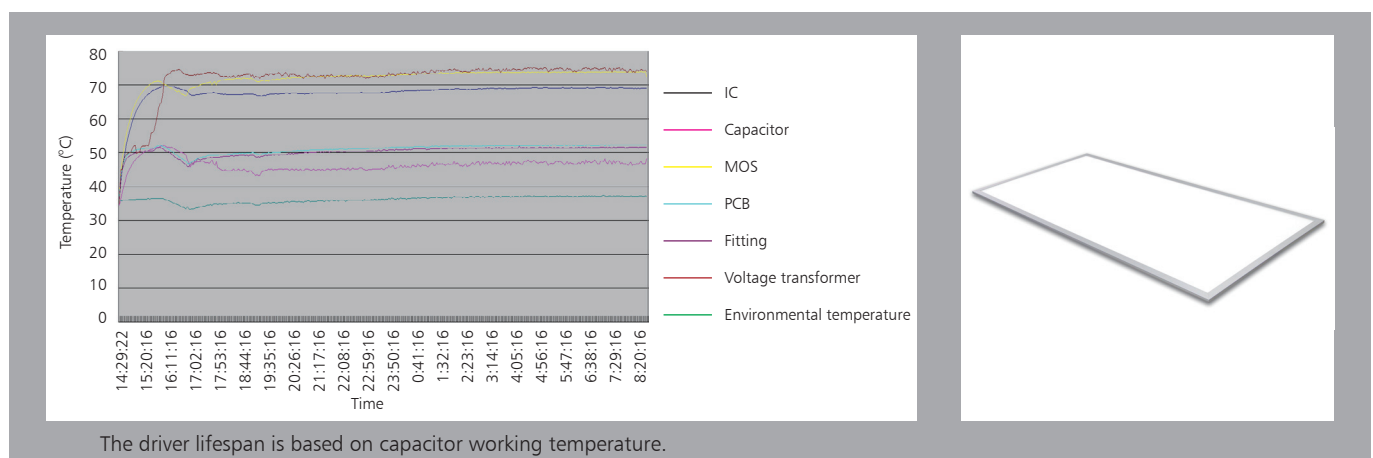

Installation

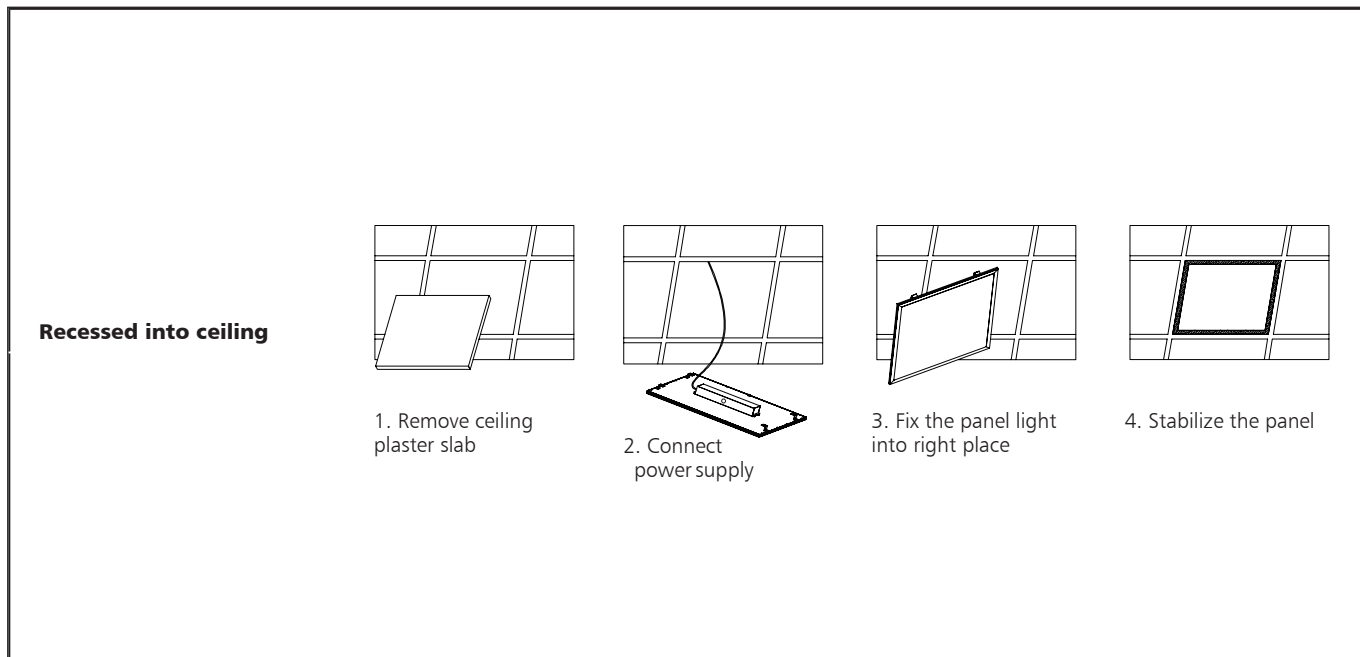

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	129*22*69.5	9.2	24.5	2

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	140	280	28
40" standard container	280	560	56

