



HAZARDOUS LOCATIONS LIGHT SPECIFICATION



L Series





Ratings and Certification

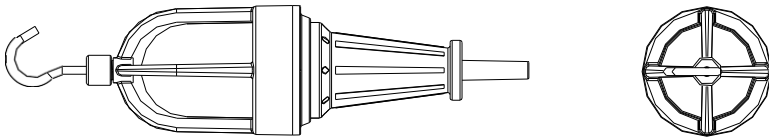
- NEMA 4X, IP66
- UL1598A/UL844/UL924
- CSA C22.2 No.137/No.250.0
- Class I, Division 1, Groups C, D
- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups E, F, G
- Class III
- Marine and Wet Locations
- IECEX
- ATEX
- 5 years or other warranty period specified in agreement
- L70 rating for more than 150000 hours

Typical Model Specification

Product Number	Wattage	CCT	Voltage	Lumens	Working Hours
EX-5W LYZD	5W	3000-7000K	AC100-277V	650	5 years
EX-7W LYZD	7W	3000-7000K	AC100-277V	910	5 years
EX-9W LYZD	9W	3000-7000K	AC100-277V	1170	5 years

Mechanical Information

	Size (in)
AC100-277V models	Ø5.2X20.7

Structure Diagram**Technical Data**

Permissible ambient temperature:	10°C±55°C
Power:	3~10W
Rated voltage AC:	AC100-277V
Frequency:	50/60Hz
Battery Warranty:	5 Years
Enclosure material:	Copper free aluminum alloy