

WALLPACK.Y



FIXTURE CODE: **WPY**

LIGHT ENGINE RETROFITS

- L70 Rated life of 100,000+ hours
- Minimum CRI: 70; Custom CRI available upon request.
- Operating temp: -30° C to +60° C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- Eligible for Rebates
- 50-90% energy savings
- Manufactured in the USA


INSTALLATION

- Licensed electrician required
- Contact Noribachi for additional support

WARRANTY

- 5-year manufacturer's warranty
- **10YR** - Optional 10-year manufacturer's warranty
- U.S. manufacturing and quality control

CERTIFICATIONS



APPEARANCE

HOUSING	LENS	MOUNTING	DIFFUSION
<ul style="list-style-type: none"> • DARK BRONZE • COL- CUSTOM 	<ul style="list-style-type: none"> • HIGH IMPACT/HEAT RESISTANT BOROSILICATE GLASS 	<ul style="list-style-type: none"> • SURFACE 	<ul style="list-style-type: none"> • GLASS OPTICAL

ELECTRICAL CHARACTERISTICS

- Standard AC input: up to 480 VAC
- EMI filter: 47CFR, part 2, part 15
- Power factor: >.9
- Total harmonic distortion: <20%
- Surge protection: IEC/EN 61000-4-5 EMC test standard

OPTIONAL UPGRADES


- **PC1** - 120V Button Photocell
 - **PC2** - 208V-277V Button Photocell
 - **HV1** - 480V up to 150W
 - **OS** - Occupancy Sensor
 - **EM** - Emergency Battery Backup, 5W, 600 Lumens, 90 Minutes*
- *MUST PROVIDE EXACT VOLTAGE REQUIREMENTS

OPTIONAL BEAM SPREAD AND TYPE DISTRIBUTION

- **80D** - Optional 80° Beam Spread

DIMENSIONS

LENGTH: 18"
 WIDTH: 13"
 HEIGHT: 9.84"

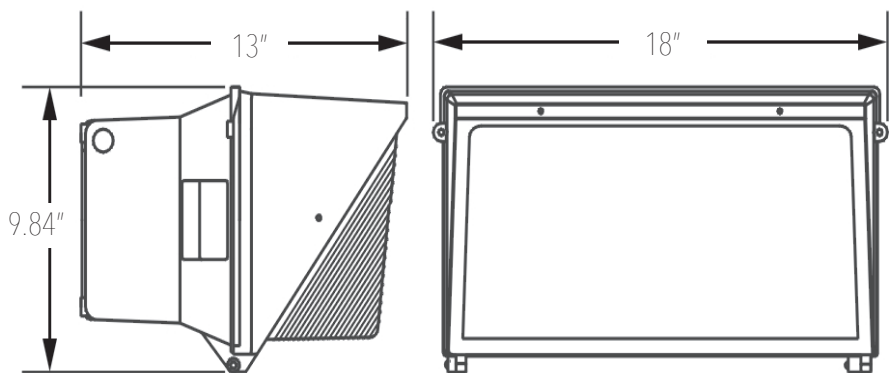

WALLPACK.Y

AVAILABLE LIGHT ENGINE RETROFITS



HEX-042

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	63W	125-300W	8,862lm	HEX-042-B-CW-MT-WPY

LIN-054

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	81W	180-360W	11,394lm	LIN-054-B-CW-MT-WPY

HEX-063

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	95W	200-400W	13,293lm	HEX-063-B-CW-MT-WPY

LIN-072

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	108W	225-435W	15,192lm	LIN-072-B-CW-MT-WPY

HEX-084

<i>DRIVE CURRENT</i>	<i>WATTAGE</i>	<i>REPLACES</i>	<i>LUMEN OUTPUT</i>	<i>CATALOG #</i>
B	126W	300-525W	17,724lm	HEX-084-B-CW-MT-WPY