


Model Number


LS-HHBC400W

LS-HHBC500W

LS-HHBC600W

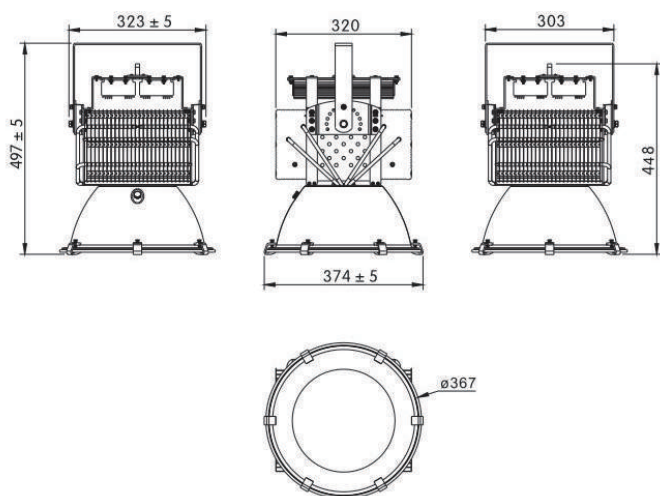

LS-HHBC400W

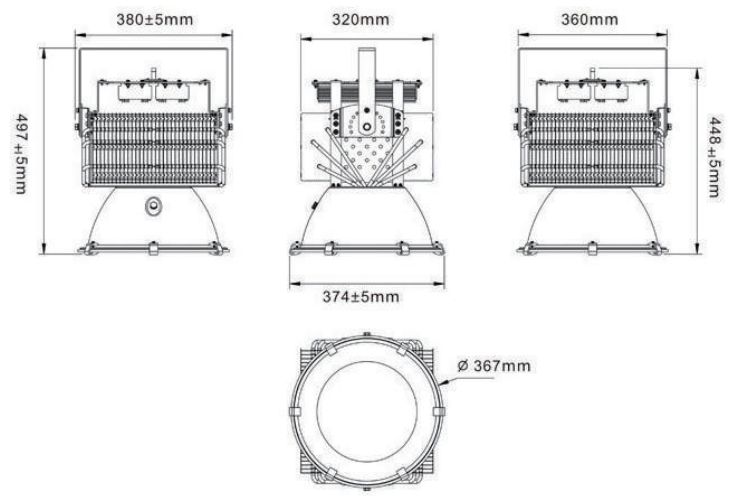


LS-HHBC500W/600W


Luminous Intensity Distribution(C)

UNIT:cd
— V 0.0DEG PLAN
— H 0.0DEG PLAN


BeamAngle(50%):85.0 Deg
BeamAngle(10%):105.0 Deg

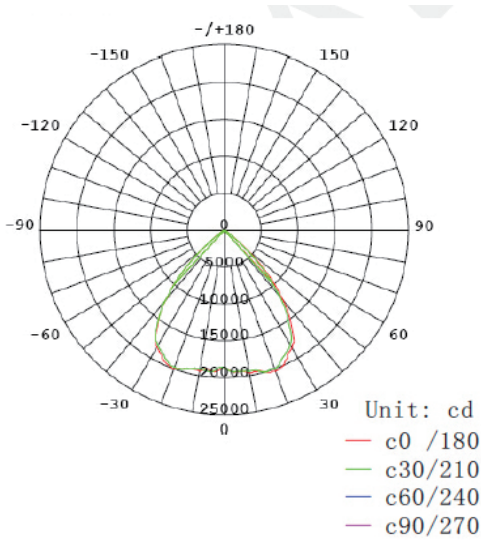

LS-HHBC400W

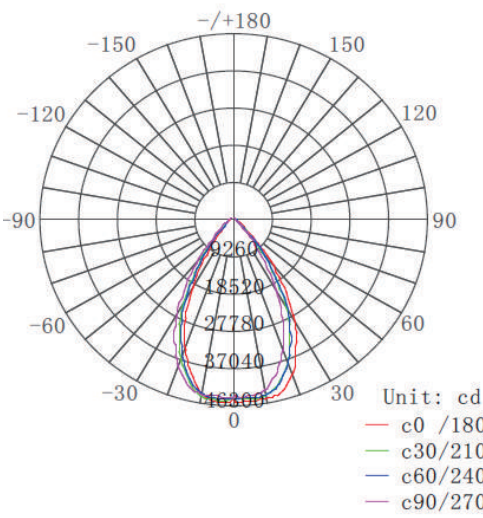

LS-HHBC500W

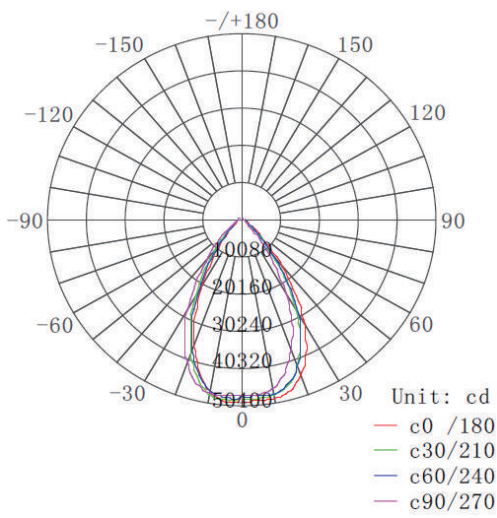

LS-HHBC600W

Main Parameters

Model#	LS-HHBC400W	LS-HHBC500W	LS-HHBC600W
Power	400W	500W	600W
Output Lumen	36000lm	45000lm	54000lm
Certificate	DLC CE RoHS		
Voltage	90~277VAC (180V-528VAC available)		
LED/Driver brand	CREE XML LED/MEAN WELL Driver		
Material	Die-casting aluminum		
CCT	3000K-6500K		
Beam Angel	85Deg.(50%) 105Deg.(10%)		
PF	>0.9		
CRI	≥75		
IP Rating	IP65 Outdoor use		
Working Temperature	-22°F ~140°F /-30℃~60℃		
Lifespan	>50,000hrs		

Applications

LED highbay lights are used in workshops, factories, warehouse, toll stations, gas stations, supermarket, exhibition halls, gymnasiums, etc..

