



T8 LED INTEGRATED TUBE MODELS

CCT	8 Feet
3000K	out of stock
4000K	out of stock
5000K	8FT-T8-60W-50K



T-8 LED INTEGRATED TUBE

T8 LED Integrated Tube perform efficiently in conditions where low voltage, halogen, or fluorescent luminaires have traditionally been used. Our LED tubes incorporate integral drivers, are self-supporting, and can be surface mounted. Individual units can be plugged together for continuous lengths.

T8 LED Integrated Tube connect directly to line voltage and can be used in any interior space.

FEATURES


- Integrated Universal Driver
- Units can be plugged together
- Direct AC input
- Diffuse lens
- For use with G5 Connectors

BENEFITS

- No Mercury
- Eliminates useless fluorescent ballasts
- No fixture needed
- Long lifetime
- Low maintenance cost
- High efficiency
- Damp location rated
- Compatible with voltages 85-265 V

PERFORMANCE & PARAMETERS

CCT	5000K
Beam Angle	120°
CRI	> 80 Ra
Efficacy	110 lm/W
Rated Average Life	50,000 Hrs
Input Voltage	85-265 V
Power Frequency	50 / 60 Hz
Power Tolerance	+/- 10%



Beam angle 120°

	8 FEET
Luminous Flux	6700 lm
Input Power	60W
Cover	stripe/ frosted
Fluorescent Equivalent	150W-180W

WARRANTY

5 Year Warranty



T-8 LED INTEGRATED TUBE

PHYSICAL CHARACTERISTICS ENGLISH


	8 FEET
Body Length (A)	96"
Lighted Length (B)	90"
Cross-Section (H x W)	1.3 x 1.3"

PHYSICAL CHARACTERISTICS METRIC


	8 FEET
Body Length (A)	2400mm
Lighted Length (B)	2340mm
Cross-Section (H x W)	33 x 33mm

Operating Temperature	-4 to +104F, -20 to +40°C
Operating Humidity	10 to 85% RH
Operating Frequency	50-60Hz

PARTS & ACCESSORIES

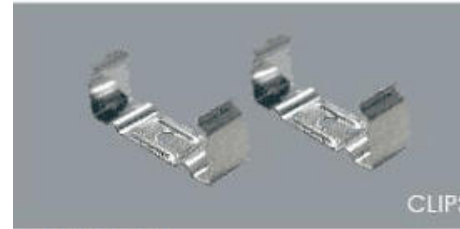

4 pcs clips, 1 pc cable,
1 pc connector

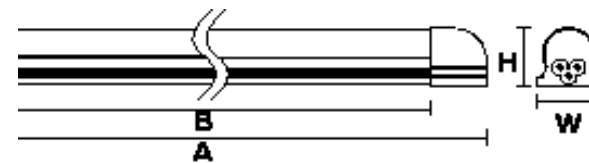

See tables above for dimensions

