



Explosion Proof Light D Series



Industrial Field & Hazardous Locations

VENAS

Applications

Oil and Gas industry

- All petroleum production and refining
- Petroleum loading and transportation
- Petroleum storage and retail
- LNG industry

- All mining operations and service

Chemical industry

- All types of paint facilities
- Chemical production and storage

Ocean, marine and aerospace field

- Ocean platform operation facilities and structure
- Aerospace clean room and production
- Ocean vessel operations

Metal treatment

- Steel and aluminum factories
- Pumping stations in any environment
- Metal smelting, foundry and fabrication

Food and alcohol industry

- Flour and fine particle production and storage
- Food and distilling production
- Alcohol industry

Other high humidity, high dust,
high temperature, vapor locations



Explosion Protection

Marking UL844_(North American)

Class I, Div. 1, Groups C, D

Class I, Div. 2, Groups A,B,C,D

Class II, Div. 1, Groups E,F,G

Class II, Div. 2, Groups F,G

Class III

Marine Marking

UL 1598A

ABS

Other Rating

IP 66

IK 10



Materials

- Housing: Aluminum
- Lens: Tempered glass
- Hardware: stainless steel
- Mounting Bracket: stainless steel



Specification

Model	Wattage	Color Temperature	Voltage	Lumens	Warranty	CRI	Emergency Time
EX-20W D2YZDA	20W	2200K-7000K	AC100-277V (by driver or by IC) Or AC200-480V (<65W) Or DC12-48V	2800	5 years	80	3 Hours
EX-40W D2YZDA	40W			5600			
EX-60W D2YZDA	60W			8400			
EX-80W D2YZDA	80W			11200			
EX-100W DYZDA	100W		AC100-277V (by driver or by IC) Or AC200-480V Or DC12-48V	14000			
EX-150W DYZDA	150W			21000			
EX-200W DYZDA	200W			28000			

"D,D2"=Product series; "Y"=D or N: Dimmable or non-dimmable; "Z"=CCT, from 2200-7000K; "D"=Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120°; A for glass info.: blank for flat glass.

Packing Information

Model	Quantity/Ctn	Dimension(MM)	Net weight(KG)	Gross weight(KG)
D	1	502×376×350	17.9	19.5
D2	1	400×385×335	7	9.5

Light Distribution

40D				60D				90D				120D			
Center Beam fc		Beam Width		Center Beam fc		Beam Width		Center Beam fc		Beam Width		Center Beam fc		Beam Width	
4ft	2008fc	4ft	4ft	4ft	1434fc	6ft	5ft	4ft	1024fc	8ft	8ft	4ft	683fc	11ft	11ft
8ft	480fc	7ft	7ft	8ft	343fc	11ft	11ft	8ft	255fc	15ft	16ft	8ft	170fc	21ft	22ft
12ft	203fc	11ft	11ft	12ft	145fc	17ft	14ft	12ft	105fc	24ft	26ft	12ft	73fc	32ft	33ft
16ft	115fc	15ft	16ft	16ft	81fc	22ft	23ft	16ft	58fc	32ft	33ft	16ft	39fc	43ft	45ft
20ft	88fc	19ft	23ft	20ft	69fc	27ft	31ft	20ft	39fc	39ft	45ft	20ft	26fc	53ft	56ft
■ Vert, Spread;40° ■ Horiz, Spread;40°				■ Vert, Spread;60° ■ Horiz, Spread;60°				■ Vert, Spread;90° ■ Horiz, Spread;90°				■ Vert, Spread;120° ■ Horiz, Spread;120°			

Features




- Working Temperature: -40°C ~ +55°C.
- High quality SMT LED and Meanwell Driver.
- Light-weight design by aircraft aluminum.
- Heavy-duty and high impact resistance.
- Three connection cable entry points.
- Replaceable LED board and drivers.
- Integrated junction box for driver with emergency back up.
- Dimmable and battery back up function available.
- Marine rating powder coated appearance treatment.
- Up to 5 years limited warranty option.
- Emergency Battery back up to three hours.
- Various installation ways for different applications.
- Glass lens or Glass with polycarbonate lens to make bigger beam angle.



Dimension Unit: mm or inch




D2 Series

NPT3/4 or M25



This structure type with bracket, flat glass and optics lens to generate 40°, 60°, 90° and 120° light distribution.


D Series




This structure type with bracket, flat glass and optics lens to generate 40°, 60°, 90° and 120° light distribution.

Mounting


No.1: Ceiling Mounting

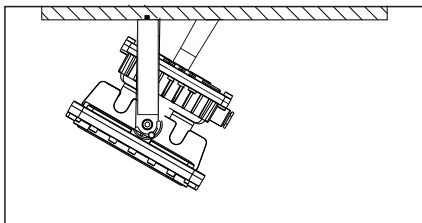

No.2: Wall Mounting

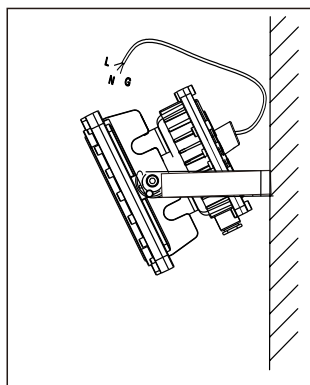

No.3: Pole Mounting

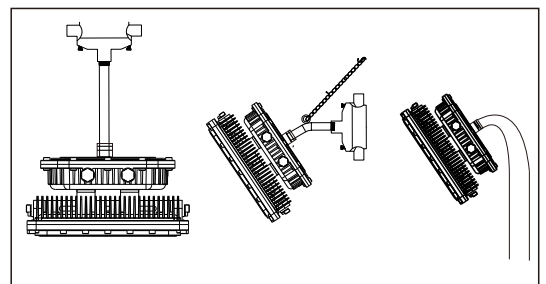



D



D2

Accessories

Junction Box



Bracket



Straight Pipe



Chain



Metal Conduit



Bended Pipe

