

Shenzhen Solway New Energy Ltd

ALL IN ONE SOLAR STREET LIGHT SPECIFICATION (AIRSHIP SERIES)






Parameters


Light Output	150W		
Solar Panel	150W(Monocrystalline)		
Battery	888WH		
Light Efficiency	15000 lm		
LED Chip	SEOUL		
Warranty	3 Years		
ССТ	5000K-6500K		
Beam Angle	157X60 degree		
Lamp Angle	15 degree		
Rainy Days Backup Time	3 days		
Working Mode	First 3hours 100% brightness, later 3hours 60% brightness, last 6hours 30% brightness		
Working Temperature	−20°C to 60°C		
Charging Time	9-11 hours		
Installation Height	10-12 meters		
Required Pole Size:	60-75 mm(top end)		
Recommended Mounting Distance	25 m		


Features

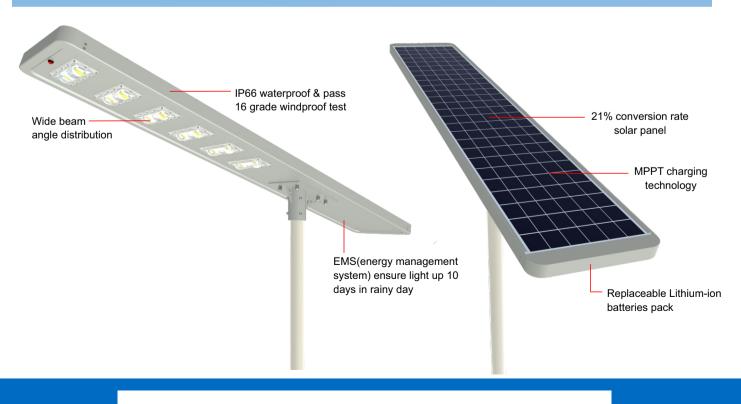



Product size & Packing info

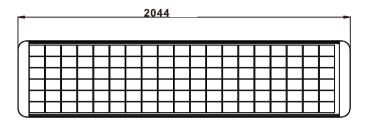



Wattage	Packing	Carton Size	N.W.(kg)	G.W.(kg)
120W Lamp Body	1pcs/ctn	2156X475X255mm	23.5	27.5

Applications

Widely used in the road, street, and factory, park road, rural, mountainous area and the remote area lighting project, courtyard, schools, square and other need to place.

