




### Basic Data

Product Number	Wattage	Color Temp.	Voltage	Lumens	Warranty	CRI
EX-25W NYXT3	25	4000K-5700K	100-277/200-480V	3500	5 years	70
EX-35W NYZT3	35	4000K-5700K	100-277/200-480V	4200	5 years	70
EX-50W NYZT3	50	4000K-5700K	100-277/200-480V	5600	5 years	70

“N”=Product code, “Y”=D or N, dimmable or non-dimmable “Z”=CCT, from 400-5700K, 40 for 4000K, 45 for 4500K... “T3”=Beam angle

### Dimensions

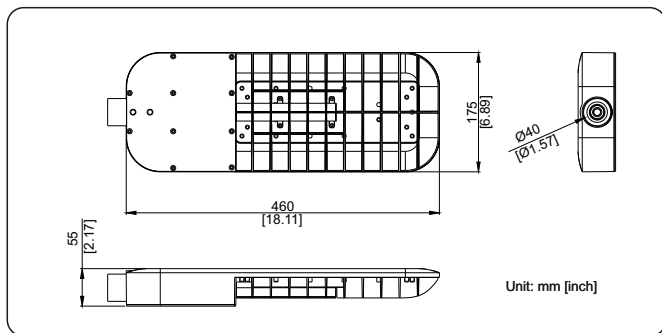

### Lighting Distribution

50W/120D


	Center Beam fc	Beam Width	
17ft	6fc	36ft	73ft
34ft	1.5fc	72ft	145ft
51ft	0.65fc	108ft	218ft
68ft	0.36fc	143ft	290ft
85ft	0.23fc	179ft	363ft

■ Vert, Spread; 90°  
■ Horiz, Spread; 120°

### Approvals

Marking Atex	II2 G Ex db IIB T6 Gb II2 D Ex db IIIC T80 Db IP66
Marking IECEx	Ex db IIB T6 Gb Ex db IIIC T80 Db IP66
Marking UL844 <small>(North American)</small>	Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups E, F, G Class III
Marine Marking	UL 1598A ABS and DNV Type Approved
Other Rating	IP 66 IK 10

### Installation



Pole Mounting