

LED PLANT FIXTURE “L” SERIES




Ordering Information


GL	Zi	xxxW	X	Y	Z
Product Code	Series	Wattage	Dimming	Spectral Type	Control Method
GL=Grow Light	L1=300W L1=400W L2=500W L2=600W L3=700W L3=800W	300W 400W 500W 600W 700W 800W	X=N Non-Dimmable X=D Dimmable	Y=I PhysioSpec Indoor Y=G PhysioSpec Greenhouse	Z=N Without Remote Control Z=G Taking Remote Control

Available Spectrums

PhysioSpec Indoor™

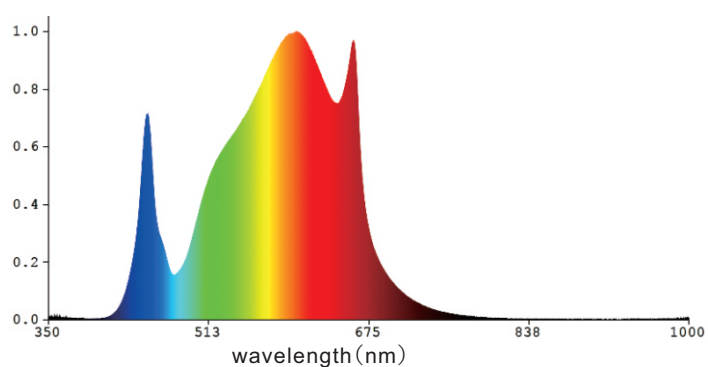

PhysioSpec Greenhouse™

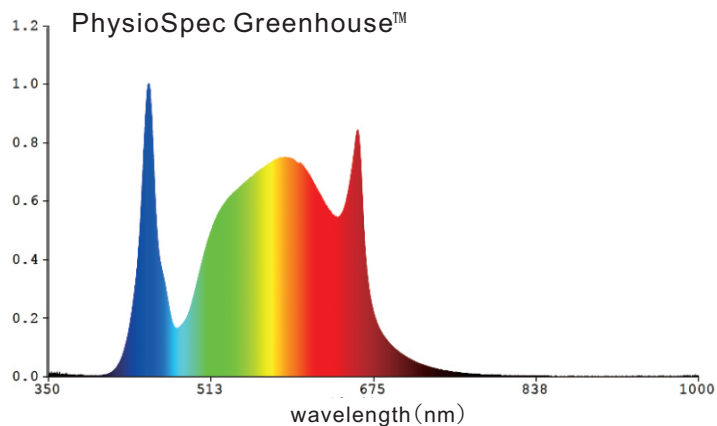

LED PLANT FIXTURE “L” SERIES

Specifications

- THD:
- Spectrum:
- Efficacy:
- Dimming:
- Lifetime:
- Light Source:
- AC Input Power:
- AC Input Voltage:
- Light Distribution:
- Light Output PPF:
- Mounting Height:
- Thermal Management:
- Max. Ambient Temperature:

GL-L1300W XYZ GL-L1400W XYZ	GL-L2500W XYZ GL-L2600W XYZ	GL-L3700W XYZ GL-L3800W XYZ
<15%		
PhysioSpec Indoor™ / PhysioSpec Greenhouse™		
2.6μmol/J	2.6μmol/J	2.6μmol/J
0-10V		
>50,000hrs		
LED		
300W/400W	500W/600W	700W/800W
120-277V AC, 50/60Hz		
120°		
780μmol/s/1040μmol/s	1300μmol/s/1560μmol/s	1820μmol/s/2080μmol/s
6"-12"(15.2-30.5cm) Above Canopy		
Passive		
-30°C ~ 35°C		

Listings

Rating | IP65
Safety | UL 8800,
UL 1598
Wet Location


Listed | DLC

Warranty


LEDs | 5 years
Drivers | 5 years




Dimensions

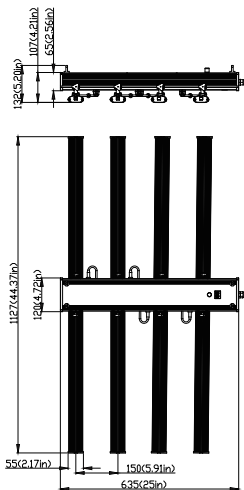

GL-L1300W XYZ
GL-L1400W XYZ

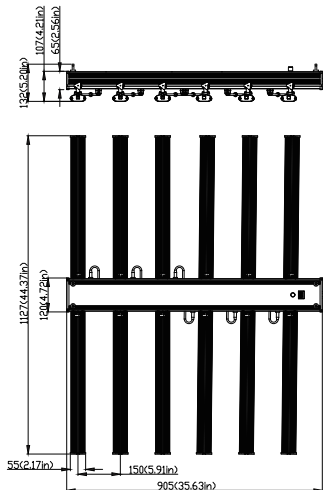

GL-L2500W XYZ
GL-L2600W XYZ

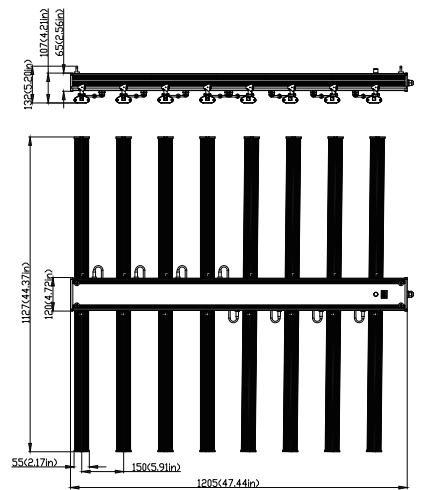

GL-L3700W XYZ
GL-L3800W XYZ

Installation Instruction



Equipment Used List

1. Driller 1x
2. Drill Bit 1 Box (OD: 1~10mm)
3. Sunglasses 1x
4. Gloves 1 pair
5. Thermometer 1x







WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY
Before installation, turn power off.

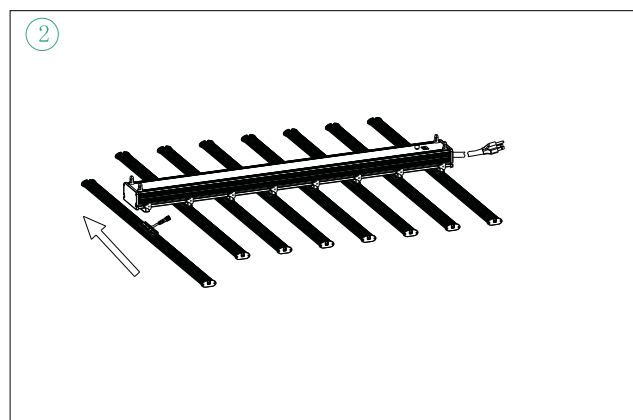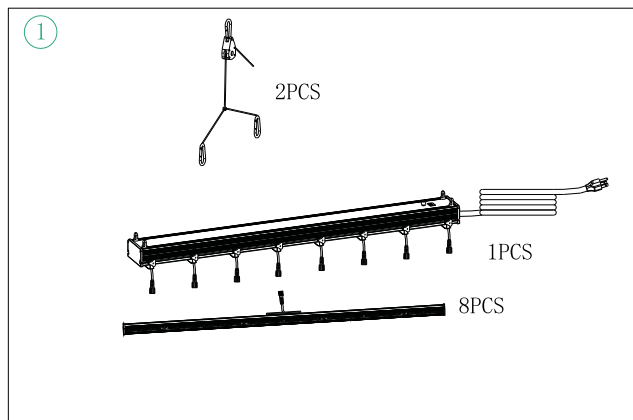

LED PLANT FIXTURE “L” SERIES

Installation Instruction

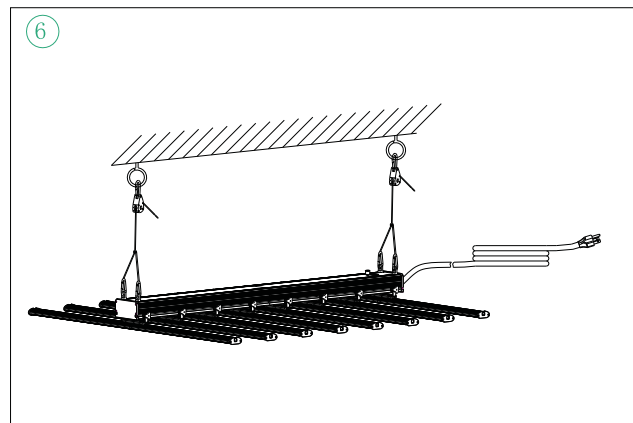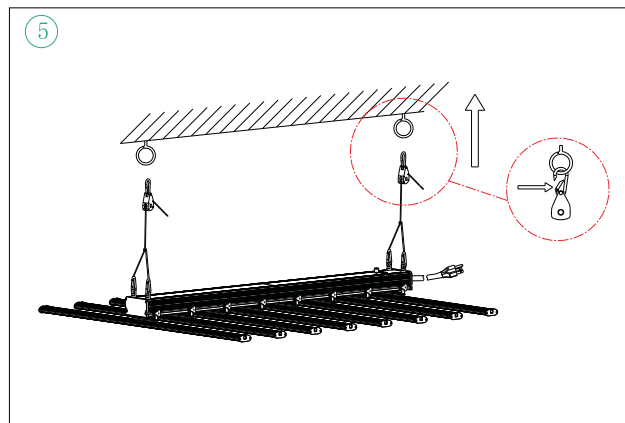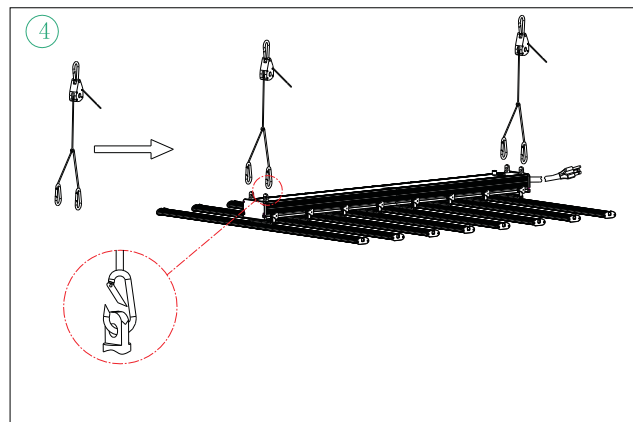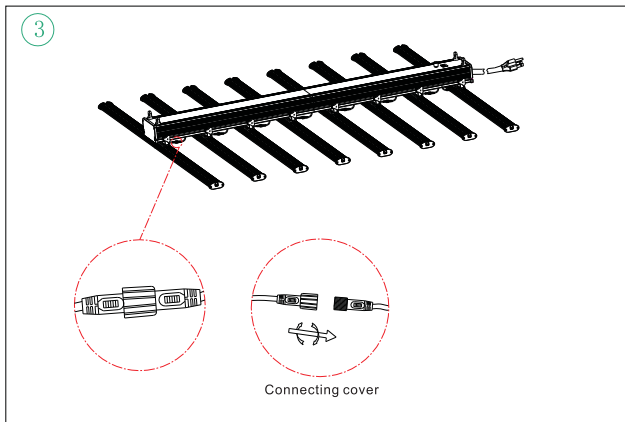

1. Take out the fixture and accessory, include 1x fixture, 8x LED module sub-assembly, 1x power cable, 2x Nylon installation cable.
2. Match the LED module one by one, max quantity is 8 modules.
3. Join DC output male connector with female connector one by one, and tighten the connecting cover.
4. Install the nylon cable lock to connecting bosses as picture.
5. Hang the lock of nylon wire to the installation hook and adjust the height of grow light.
6. Connect the power plug and turn on the switch.

Package Information

	GL-L1300W XYZ GL-L1400W XYZ	GL-L2500W XYZ GL-L2600W XYZ	GL-L3700W XYZ GL-L3800W XYZ
Package Size	1188*307*212mm	1188*382*212mm	1290*445*230mm
Package Weight	7.37KG	10.59KG	14KG
PC/Carton	1PC	1PC	1PC

The Picture of Important Accessories

